

ENG

MOTION CONTROL

TPD32-EV
DC ARMATURE CONVERTERS



GEFRAN



Thanks to fifty years of experience, Gefran is the world leader in the design and production of solutions for **measuring, controlling, and driving industrial production processes.**

We have branches in 14 countries and a network of over 80 worldwide distributors.

QUALITY AND TECHNOLOGY

Gefran components are a **concentration of technology**, the result of constant research and of **cooperation with major research centers.**

This makes Gefran synonymous with quality and expertise in the design and production of:

- **sensors** for measuring main variables such as **temperature, pressure, position and force**
- **state-of-the-art components and solutions for indication and control**, satisfying demands for optimization of processes and intelligent management of energy consumption
- **automation platforms** of various complexities
- **electronic drives and electric motors** in AC and DC for all industrial automation, HVAC, water treatment and lift needs.

Gefran's know-how and experience guarantee continuity and tangible solutions.

SERVICES

A team of Gefran experts works with each customer to select the ideal product for its application and to help install and configure devices (technohelp@gefran.com).

Gefran offers a wide range of courses at different levels for the technical-commercial study of its product as well as specific courses *on demand*.



APPLICATIONS



INDUSTRIAL HOISTING



METAL PROCESSING



TEST BENCHES



PLASTIC AND RUBBER PROCESSING



LIFTS FOR MINES



AMUSEMENT PARKS

In addition to foreseeing the market's application needs, Gefran forms partnerships with its customers to find **the best way to optimise and boost the performance of various applications.**

Gefran products communicate with one another to provide integrated solutions, and can dialogue with devices by other companies thanks to compatibility with numerous fieldbuses.

CANopen

DeviceNet

Modbus

PROFIBUS

DESCRIPTION



Series TPD32 EV -...-2B/4B

TPD32-EV DC drive series is a product of the ever growing technological demands of modern industrial systems, and draws on Gefran's years of experience in the field of DC motor speed control. This is available in a wide range of motor power ratings and power supply types and it offers solutions for both 2 quadrant and 4 quadrant operation and system solution as 12 pulses parallel and series configuration.

Designed to minimize user system requirements, this range offers a range of functions and dedicated application packages to cover the most complex requirements of modern industrial automation systems.

Series TPD32 EV-CU

Regulation control units are ideal for controlling the full range of external power bridges available on the market.

The regulation control unit implements all the control systems required of an armature converter, including snubber filters, field regulator, regulation card, for simple, immediate power structure customisation.

Series TPD32 EV-FC

Series of converters designed to supply highly inductive loads such as electromagnets, chokes, synchronous motor excitation circuits, galvanic applications, etc..

POWER RATINGS

	TPD32 EV-500/...	TPD32 EV-575/...	TPD32 EV-690/...
2 quadrant	[..-2B]: from 20A up to 3300A	[..-2B): from 280A up to 2300A	[..-2B): from 560A up to 3300A
4 quadrant	[..-4B): from 20A up to 3300A	[..-4B): from 280A up to 2300A	[..-4B): from 560A up to 3300A

THREE-PHASE POWER CIRCUIT (U/V/W)

TPD32 EV-500/...

- 230 VAC ±10%, 50/60Hz ±5%
- 400 VAC ±10%, 50/60Hz ±5%
- 440 VAC ±10%, 50/60Hz ±5%
- 460 VAC ±10%, 50/60Hz ±5%
- 480 VAC ±10%, 50/60Hz ±5%
- 500 VAC ±10%, 50/60Hz ±5%
- 2 quadrant [..-2B): from 20A up to 3300A
- 4 quadrant [..-4B): from 20A up to 3300A

TPD32 EV-575/...

- 230 VAC ±10%, 50/60Hz ±5%
- 400 VAC ±10%, 50/60Hz ±5%
- 440 VAC ±10%, 50/60Hz ±5%
- 460 VAC ±10%, 50/60Hz ±5%
- 480 VAC ±10%, 50/60Hz ±5%
- 500 VAC ±10%, 50/60Hz ±5%
- 575 VAC ±10%, 50/60Hz ±5%
- 2 quadrant [..-2B): from 280A up to 2300A
- 4 quadrant [..-4B): from 280A up to 2300A

TPD32 EV-690/...

- 230 VAC ±10%, 50/60Hz ±5%
- 400 VAC ±10%, 50/60Hz ±5%
- 440 VAC ±10%, 50/60Hz ±5%
- 460 VAC ±10%, 50/60Hz ±5%
- 480 VAC ±10%, 50/60Hz ±5%
- 500 VAC ±10%, 50/60Hz ±5%
- 575 VAC ±10%, 50/60Hz ±5%
- 690 VAC ±10%, 50/60Hz ±5%
- 2 quadrant [..-2B): from 560A up to 3300A
- 4 quadrant [..-4B): from 560A up to 3300A

TPD32 EV-CU-230/500-...:

230 VAC ... 500 VAC ±10%, 50/60Hz ±5%

TPD32 EV-CU-575/690-...:

575 VAC ... 690 VAC ±10%, 50/60Hz ±5%

TPD32 EV-FC-200/...:

60 VAC ... 200 VAC ±10%, 50/60Hz ±5%

TPD32 EV-FC-500/...:

230 VAC ... 500 VAC ±10%, 50/60Hz ±5%


SINGLE-PHASE FIELD CIRCUIT (U1/V1)

- 230 VAC ±10%, 50/60Hz ±5%
- 400 VAC ±10%, 50/60Hz ±5%
- 460 VAC ±10%, 50/60Hz ±5%

SINGLE-PHASE REGULATION CIRCUIT (U2/V2)

- 115 VAC ±15%, 50/60Hz ±5%
- 230 VAC ±15%, 50/60Hz ±5%

SOFTWARE

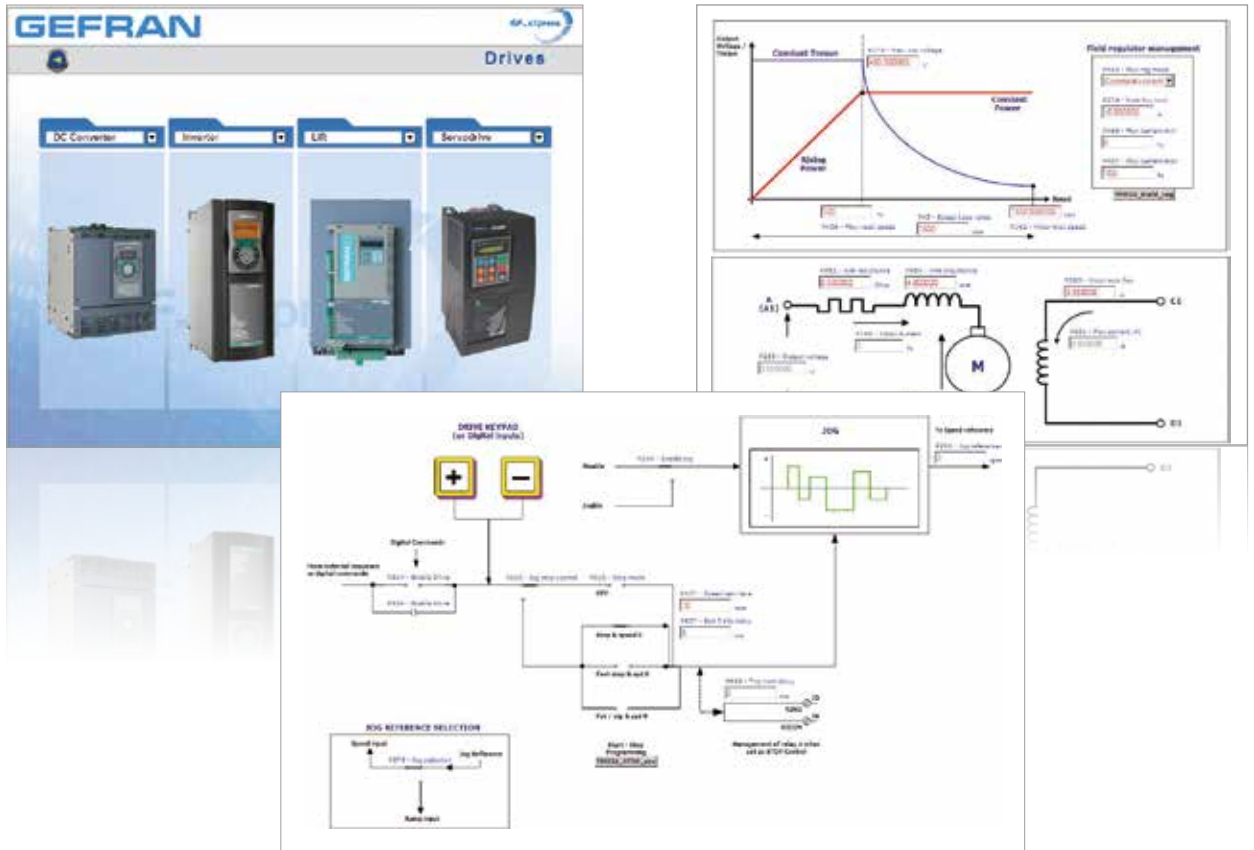

GF-eXpress PROGRAMMING SOFTWARE

All drives and automation devices manufactured by the GEF-RAN group (PLC, HMI, instrumentation, etc.) can be programmed via PC using the **GF-eXpress** configurator.

This PC tool enables complete **programming and control of the product**, based on a powerful, user-friendly and intuitive software platform:

- > Programming with parameter list or block diagrams
- > Integrated oscilloscope
- > Multi-drop network management with up to 32 drives.



GENERAL CHARACTERISTICS

WIDE RANGE OF POWER SUPPLIES

A single product for all power supply types, from 230Vac to 690Vac.

SERIAL COMMUNICATION

For programming with PC, the RS485 serial line with Modbus RTU protocol is standard on the TPD32-EV.

FIELDBUS CARDS (OPTIONAL)

Interfacing with the most commonly-used fieldbus systems:

- > ProfibusDP (SBI-PDP-32),
- > CANopen (SBI-COP)
- > DeviceNet (SBI-DN).



PROGRAMMING KEYPAD

The optional KB-TPD32-EV programming keypad featuring full display of parameters and variables makes the converter extremely intuitive and easy to use.

FIELD REGULATOR

Integrated field regulator on all the range, 1ph supply: 230Vac...460Vac, 50/60Hz, rated currents from 10 to 70A.

TBO-32 - I/O EXPANSION CARD

Converter standard input / output expansion card:

- > 4 digital inputs (+15Vdc ... +30Vdc: 3 ... 6mA)
- > 4 digital outputs (+15Vdc ... +30Vdc, max 50mA)
- > 2 analog outputs ($\pm 10V$, max 5mA).

OVERLOAD

Programmable up to 200% with dedicated firmware function.



TPD32-EV DC ARMATURE CONVERTERS

Standard supply configuration	<ul style="list-style-type: none"> • Speed feedback via tachogenerator and/or digital or sinusoidal encoder <ul style="list-style-type: none"> - 2 encoder inputs: sinusoidal (power supply at 5 V) and digital (power supply at 24 V); - 1 Tachogenerator input; • Digital I/O logic control in PNP configuration; • Analog inputs: 3 Differential, 12 Bits, programmable, selectable for ± 10 VDC, 0 - 20 mA, 0 - 10 VDC, 4 - 20 mA; • 2 Analog outputs ± 10Vdc; • 8 Digital inputs (4 fixed + programmable); • 4 programmable digital outputs; • Relay outputs: 1 Drive OK normally closed contact, 1 programmable normally closed contact; • 1 Motor thermistor input; • RS485 Serial line (Modbus RTU protocol); • Programmable overload up to 200%; • Interfacing with fieldbus protocol as: Profibus DP®, CANopen® and DeviceNet; • LED diagnostics module. 								
Precision	<table border="1"> <tr> <td data-bbox="392 757 724 846">Speed control</td> <td data-bbox="724 757 1490 846"> with sinusoidal encoder: typically 0.01% with digital encoder: typically 0.02% with tachogenerator: typically 0.1% </td> </tr> <tr> <td data-bbox="392 846 724 902">Torque regulation</td> <td data-bbox="724 846 1490 902">typical 0,2%</td> </tr> <tr> <td data-bbox="392 902 724 958">Analog Inputs / Outputs</td> <td data-bbox="724 902 1490 958">11 bit + sign</td> </tr> <tr> <td data-bbox="392 958 724 1016">Digital references</td> <td data-bbox="724 958 1490 1016">15 bit + sign</td> </tr> </table>	Speed control	with sinusoidal encoder: typically 0.01% with digital encoder: typically 0.02% with tachogenerator: typically 0.1%	Torque regulation	typical 0,2%	Analog Inputs / Outputs	11 bit + sign	Digital references	15 bit + sign
Speed control	with sinusoidal encoder: typically 0.01% with digital encoder: typically 0.02% with tachogenerator: typically 0.1%								
Torque regulation	typical 0,2%								
Analog Inputs / Outputs	11 bit + sign								
Digital references	15 bit + sign								
Integrated System Technology	<ul style="list-style-type: none"> • Quick start up; Autotuning of the speed and current regulators (*); 5 Independent programmable Multi-ramps; Programmable Linear and "S" shaped ramps; Seven Programmable Multispeeds; Independent regulation of the Min/Max speed for each direction sense of rotation; • Current limitation in accordance with the speed; Adaptive gains of the speed regulator; Independent management of the integral gain at zero speed; Programmable overload control; Jog function; Motorpotentiometer function; I2t motor protection; • PID function block; Servodiameter control function; "Speed Draw" function; "Autocapture" function (Flying restart); "Droop" function, SCR test function. 								
Options	<ul style="list-style-type: none"> • Programming keypad KB; • I/O expansion card TBO-32; • Profibus interface SBI-PDP-32; • DeviceNet interface SBI-DN; • CANopen interface SBI-COP; • Programmable APC300 application card with Master CAN I/O controller and integrated Fast Link Drive to Drive communication; • Supplementary encoders management DEII. 								
Accessories	<ul style="list-style-type: none"> • Dedicated EMC filters (in accordance with EN61800-3); • Input choke (standardised for the whole line); • Programming remote keypad kit with 2 meters of cable included; • RS485 serial line kit for direct PC communication. 								
Environmental conditions	<ul style="list-style-type: none"> • Protection degree: IP20 up to 1000A (...-2B) and 1050A (...-4B), IP20/IP00 for bigger powers. • Operating temperature: from 0°C to 40°C, from + 40°C to +50°C with derating. • Storage temperature: -25°C...+55°C (Class 1K4 - EN50178). • Humidity: from 5% to 85%, relative humidity (without condensation) or ice formation (Class 3K3 under EN50178). • Altitude: max 2000 metres above sea level; above 1000 metres the current must be reduced by 1.2% per 100 metre increase. 								
Standards and Marks	<p>CE: complies with the EC directive concerning low voltage equipment (Directives LVD 2014/35/EU, EMC 2014/30/EU, RoHs 2011/65/EU)</p> <p>UL, cUL: complies with directives for the American and Canadian market (TPD32 EV ...-NA series *). <i>TPD32 EV ...-E-NA series not included.</i></p> <p>EMC: complies with the EC directive - EN 61800-3 concerning electromagnetic compatibility with the use of optional filters.</p>								

(*) Except the TPD32-EV -FC-... series

CONVERTER SELECTION – INPUT AND OUTPUT DATA

TPD32 EV-...

TPD32 EV Standard sizes	TPD32 EV-...NA American sizes	2 quadrant: 2B	4 quadrant: 4B	Frame	U _{LN} AC Input Voltage			Input Frequency	I _{DN} Rated Output Current Standard sizes	I _{DN} Rated Output Current American sizes (1)	I _{OVLD} Output Current Overload	U _{DN} DC Output Voltage															
					TPD32 EV-500 230 ... 500V _{AC} ± 10%, 3ph [V _{AC}]	TPD32 EV-575 230 ... 575V _{AC} ± 10%, 3ph [V _{AC}]	TPD32 EV-690 230 ... 690V _{AC} ± 10%, 3ph [V _{AC}]					TPD32 EV-500		TPD32 EV-575		TPD32 EV-690		AC Input Voltage for Field Circuit	U _{FN} DC Field Voltage * [0.85 U _{LN}]	I _{FN} Field Current @ 40°C	AC Input Voltage of regulation part						
20	17	•	•	A1	•			50/60 Hz ±5%	20	17	I _{DN} Programmable up to 200%	600 Vdc		520 Vdc		680 Vdc		600 Vdc		810 Vdc		720 Vdc		230 V _{AC} ± 15% or 400 V _{AC} ± 15% or 460 V _{AC} ± 10%, single-phase, 50/60Hz ±5%	Fixed or adjustable: 200 Vdc (for 230 V _{AC}) or 310 Vdc (for 400 V _{AC}) or 360 Vdc (for 460 V _{AC})	10	115 V _{AC} ± 15% or 230 V _{AC} ± 15%, single-phase, 50/60Hz ±5%
40	35	•	•	A1	•			40	35	2B		4B	2B	4B	2B	4B	[V _{AC}]	[V _{DC}]	[A]	[V _{AC}]							
70	56	•	•	A2	•			70	56															10			
110	88	•	•	A3	•			110	88															14			
140	112	•	•	A3	•			140	112															14			
185	148	•	•	A3	•			185	148															14			
280	224	•	•	B1	•	•		280	224															20			
350	280	•	•	B1	•	•		350	280															20			
420	336	•	•	B1	•	•		420	336															20			
500	400	•	•	B1	•	•		500	400															20			
560	360	•	•	C			•	560	360															25			
650	450	•	•	B2	•	•		650	450															20			
700	490	•	•	C		•		700	490															25			
770	560	•	•	C	•			770	560															25			
900	650	•	•	C			•	900	650															25			
1000	750	•		C		•		1000	750															25			
1050	750		•	C		•		1050	750															25			
1000	800	•		C	•			1000	800															25			
1050	850		•	C	•			1050	850															25			
1300	920		•	D			•	1300	920															40			
1300	980		•	D		•		1300	980														40				
1300	980	•		D		•		1300	980														40				
1400	1000	•	•	D	•			1400	1000														40				
1600	1200	•	•	D	•	•		1600	1200														40				
1900	1450	•	•	D		•		1900	1450														40				
2000	1500	•	•	D	•	•		2000	1500														40				
2100	1650	•	•	D		•		2100	1650														70				
2300	1800	•	•	D		•		2300	1800														70				
2400	1850	•	•	D	•			2400	1850														70				

TPD32 EV-.../...-...-..EXTERNAL BRIDGE

TPD32 EV Standard sizes	TPD32 EV-...-NA American sizes	2 quadrant : 2B	4 quadrant : 4B	Frame	U _{LN} AC Input Voltage		Input Frequency	I _{ON} Rated Output Current Standard sizes	I _{ON} Rated Output Current American sizes (1)	I _{OL,LD} Output Current Overload	U _{DN} DC Output Voltage				AC Input Voltage for Field Circuit	U _{FN} DC Field Voltage * (0.85 U _{LN})	I _{FN} Field Current @ 40°C	AC Input Voltage of regulation part
					TPD32 EV-500	TPD32 EV-690					TPD32 EV-500		TPD32 EV-690					
											[V _{AC}]	[V _{AC}]	2B	4B				
1200	1000	•		E	230 V _{AC} ... 500 V _{AC} ± 10%, 3-phase	[V _{AC}]	50/60 Hz ±5%	1200	1000	I _{ON} Programmable up to 200%	600 V _{dc}	4B	520 V _{dc}	230 V _{AC} ± 15% o 460 V _{AC} ± 10%, single-phase, 50/60Hz ±5%	Fixed or adjustable: 200 V _{dc} (for 230 V _{AC}) or 310 V _{dc} (for 400 V _{AC}) or 360 V _{dc} (for 460 V _{AC})	40	115 V _{AC} ± 15% or 230 V _{AC} ± 15%, single-phase, 50/60Hz ±5%	
1500	1300	•	•	E				1500	1300							40		
1700	1350		•	E				1700	1350							40		
1800	1400	•		E				1800	1400							40		
2000	1500	•	•	E				2000	1500							40		
2400	1800	•	•	E				2400	1800		70							
2700	2000	•	•	E				2700	2000		70							
2900	2200	•		E				2900	2200		70							
3300	2350	•	•	E				3300	2350		70							
1010	900	•	•	E				230 V _{AC} ... 690 V _{AC} ± 10%, 3-phase	[V _{AC}]		50/60 Hz ±5%	1010	900	I _{ON} Programmable up to 200%	810 V _{dc}	2B		720 V _{dc}
1400	1150	•	•	E	1400	1150	40											
1700	1350	•	•	E	1700	1350	40											
2000	1500	•	•	E	2000	1500	40											
2400	1800	•	•	E	2400	1800	70											
2700	2000	•	•	E	2700	2000	70											
3300	2350	•	•	E	3300	2350	70											

(1): 150% Overload factory settings.

Note:

A 12-impulse version of the converter is also available. This has two 6-impulse bridges with two different configurations: parallel (TPD32-EV -...-12P) or serial (TPD32-EV -...- 12S).

12 Pulses PARALLEL Configuration

The motor gets the sum of the DC current of two converters. Thus the current is doubled. The Power range of the drive is extended by doubling dc drive output current value. Contact Gefran Sales office for interbridge reactor calculation.

12 Pulses SERIES Configuration

The motor gets the sum of the DC voltage of two converters. Thus the voltage is doubled. (For the version powered at 690VAC, the supply voltage must not exceed 350VAC).

Possibility of emergency operation with one converter in case of a breakdown in the other converter for series configuration (with full torque and with 50 % of the former maximum armature voltage).

DC voltage range is extended by doubling dc drive output voltage value.

In order to divide symmetrically the total armature voltage in the range of the small armature current or armature current = 0, symmetry resistances must be utilized and connected in parallel to the individual current converters connected in series.

The symmetry resistances (R_{sym}) should be dimensioned in such a way that a cross current of at least 100 mA flows at maximum armature voltage.

CONVERTER SELECTION – INPUT AND OUTPUT DATA

TPD32 EV-FC – SPECIAL CONVERTER FOR INDUCTIVE LOADS



TPD32 EV-FC Sizes	2 quadrant: 2B		4 quadrant: 4B		Frame	U _{LN} AC Input Voltage [V _{AC}]	Input Frequency [Hz]	I _{DN} Rated Output Current Standard sizes [A]	I _{ovLD} Output Current Overload [A]	U _{DN} DC Output VOLTAGE		AC Input Voltage of regulation part [V _{AC}]
										2B	4B	
20	•		•		A1	TPD32-EV-FC-200: 60 V _{AC} ... 200 V _{AC} ± 10%, 3-phase TPD32-EV-FC-500/...: 230 V _{AC} ... 500 V _{AC} ± 10%, 3-phase	50/60 Hz ±5%	20	I _{DN} Programmable up to 200%	600 V _{DC}	TPD32-EV-FC-200/...: 210 V _{DC} TPD32-EV-FC-500/...: 520 V _{DC}	115 V _{AC} ± 15% or 230 V _{AC} ± 15%, single-phase, 50/60Hz ±5%
40	•		•	A1	40							
70	•		•	A2	70							
110	•		•	A3	110							
140	•		•	A3	140							
185	•		•	A3	185							
280	•		•	B1	280							
350	•		•	B1	350							
420	•		•	B1	420							
500	•		•	B1	500							
650	•		•	B2	650							

TPD32 EV -CU – EXTERNAL BRIDGE CONTROL UNIT

TPD32-EV-CU Sizes	2 quadrant / 4 quadrant	Frame	U _{LN} AC Input Voltage [V _{AC}]	Input Frequency [Hz]	I _{DN} Rated Output Current (selectable) [A]	I _{ovLD} Output Current Overload [A]	U _{DN} DC Output Voltage [V _{DC}]	AC Input Voltage for Field Circuit [V _{AC}]	U _{FN} DC Field Voltage (0.85 * U _{LN}) [V _{DC}]	I _{FN} Field Current @ 40°C [A]	AC Input Voltage of regulation part [V _{AC}]
TPD32-EV-CU-230/500-THY2-40	•	A1	40								
TPD32-EV-CU-230/500-THY1-70	•	A1	70								
TPD32-EV-CU-230/500-THY2-70	•	A1	70								
TPD32-EV-CU-575/690-THY1-40	•	A1	575 ... 690 V _{AC} ± 10%, 3-phase	40							
TPD32-EV-CU-575/690-THY2-40	•	A1		40							
TPD32-EV-CU-575/690-THY1-70	•	A1		70							
TPD32-EV-CU-575/690-THY2-70	•	A1		70							



DIMENSIONS AND WEIGHTS


TPD32 EV Standard sizes	TPD32 EV-...-NA Standard sizes	Frame	Dimensions: W x H x d (mm)	Weight kg
TPD32-EV-...-20-...-A	TPD32-EV-...-17-...-A-NA	A1	267 x 349 x 280	11
TPD32-EV-...-40-...-A	TPD32-EV-...-35-...-A-NA	A2		11.5
TPD32-EV-...-70-...-A	TPD32-EV-...-56-...-A-NA	A3	267 x 349 x 280	12
TPD32-EV-...-110-...-A	TPD32-EV-...-88-...-A-NA			
TPD32-EV-...-140-...-A	TPD32-EV-...-112-...-A-NA	B1	311 x 388 x 343.6	26
TPD32-EV-...-185-...-A	TPD32-EV-...-148-...-A-NA			
TPD32-EV-...-280-...-B	TPD32-EV-...-224-...-B-NA			
TPD32-EV-...-350-...-B	TPD32-EV-...-280-...-B-NA			
TPD32-EV-...-420-...-B	TPD32-EV-...-336-...-B-NA	B2	311 x 388 x 373.6	32
TPD32-EV-...-500-...-B	TPD32-EV-...-400-...-B-NA			
TPD32-EV-...-650-...-B	TPD32-EV-...-450-...-B-NA	C	521 x 512 x 410	61
TPD32-EV-...-560-...-C	TPD32-EV-...-360-...-C-NA			
TPD32-EV-...-700-...-C	TPD32-EV-...-490-...-C-NA			
TPD32-EV-...-770-...-C	TPD32-EV-...-560-...-C-NA			
TPD32-EV-...-900-...-C	TPD32-EV-...-650-...-C-NA	C	521 x 512 x 410	65
TPD32-EV-...-1000-...-C	TPD32-EV-575/...-750-...-C-NA			72
TPD32-EV-...-1050-...-C	TPD32-EV-500/...-800-...-C-NA	D	704 x 1435 x 536	152 (2B)
TPD32-EV-...-1300-...-D	TPD32-EV-...-920-...-D-NA			203 (4B)
TPD32-EV-...-1300-...-D	TPD32-EV-575/...-980-...-D-NA			165 (2B)
TPD32-EV-...-1400-...-D	TPD32-EV-...-1000-...-D-NA			215 (4B)
TPD32-EV-...-1600-...-D	TPD32-EV-...-1200-...-D-NA	D	704 x 1435 x 536	165 (2B)
TPD32-EV-...-1900-...-D	TPD32-EV-...-1450-...-D-NA			215 (4B)
TPD32-EV-...-2000-...-D	TPD32-EV-...-1500-...-D-NA			191 (2B)
TPD32-EV-...-2100-...-D	TPD32-EV-...-1650-...-D-NA			241 (4B)
TPD32-EV-...-2300-...-D	TPD32-EV-...-1800-...-D-NA	D	704 x 1435 x 536	191 (2B)
TPD32-EV-...-2400-...-D	TPD32-EV-...-1850-...-D-NA			241 (4B)

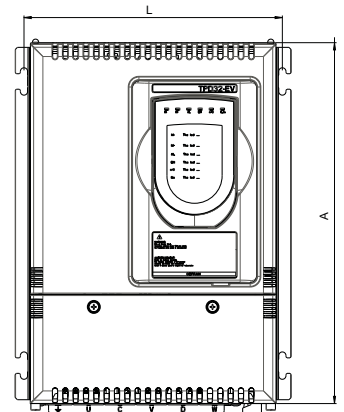

TPD32 EV-CU	Frame	Dimensions: WxHxd - mm	Weight (kg)
TPD32-EV-CU-...-THY1-40	A1	267 x 349 x 280	11
TPD32-EV-CU-...-THY2-40			
TPD32-EV-CU-...-THY1-70			
TPD32-EV-CU-...-THY2-70			

TPD32-EV Ponti Esterni	Frame	Dimensions: WxHxd - mm	Weight (kg)
TPD32 EV-690/840-1010-2B-E	E	500 x 760 x 275	70
TPD32 EV-500/600-1200-2B-E		500 x 570 x 275	65
TPD32 EV-690/840-1400-2B-E		500 x 760 x 275	70
TPD32 EV-500/600-1500-2B-E		500 x 760 x 275	70
TPD32 EV-690/840-1700-2B-E		620 x 764 x 360	100
TPD32 EV-500/600-1800-2B-E		500 x 760 x 275	70
TPD32 EV-500/600-2000-2B-E		500 x 760 x 275	70
TPD32 EV-690/840-2000-2B-E		620 x 764 x 360	100
TPD32 EV-500/600-2400-2B-E		620 x 764 x 360	100
TPD32 EV-690/840-2400-2B-E		712 x 775 x 395	140
TPD32 EV-500/600-2700-2B-E		712 x 785 x 395	140
TPD32 EV-690/840-2700-2B-E		712 x 775 x 395	140
TPD32 EV-500/600-2900-2B-E		712 x 775 x 395	140
TPD32 EV-500/600-3300-2B-E		780 x 1180 x 420	260
TPD32 EV-690/840-3300-2B-E		780 x 1180 x 420	260
TPD32 EV-690/720-1010-4B-E		500 x 1310 x 375	130
TPD32 EV-690/720-1400-4B-E		500 x 1310 x 375	130
TPD32 EV-500/520-1500-4B-E		500 x 1310 x 375	130
TPD32 EV-500/520-1700-4B-E		500 x 1310 x 375	130
TPD32 EV-690/720-1700-4B-E		620 x 1314 x 475	170
TPD32 EV-500/520-2000-4B-E		500 x 1310 x 375	130
TPD32 EV-690/720-2000-4B-E		620 x 1314 x 475	170
TPD32 EV-500/520-2400-4B-E		620 x 1314 x 495	170
TPD32 EV-690/720-2400-4B-E		712 x 1335 x 475	240
TPD32 EV-500/520-2700-4B-E		712 x 1335 x 490	240
TPD32 EV-690/720-2700-4B-E		712 x 1335 x 475	240
TPD32 EV-...-3300-4B-E		780 x 1890 x 470	435

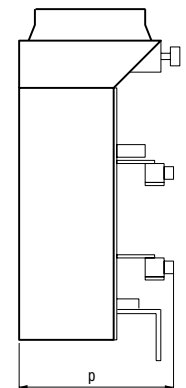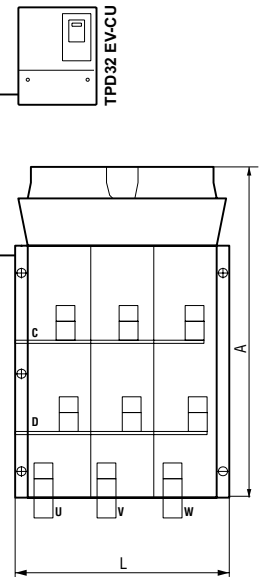

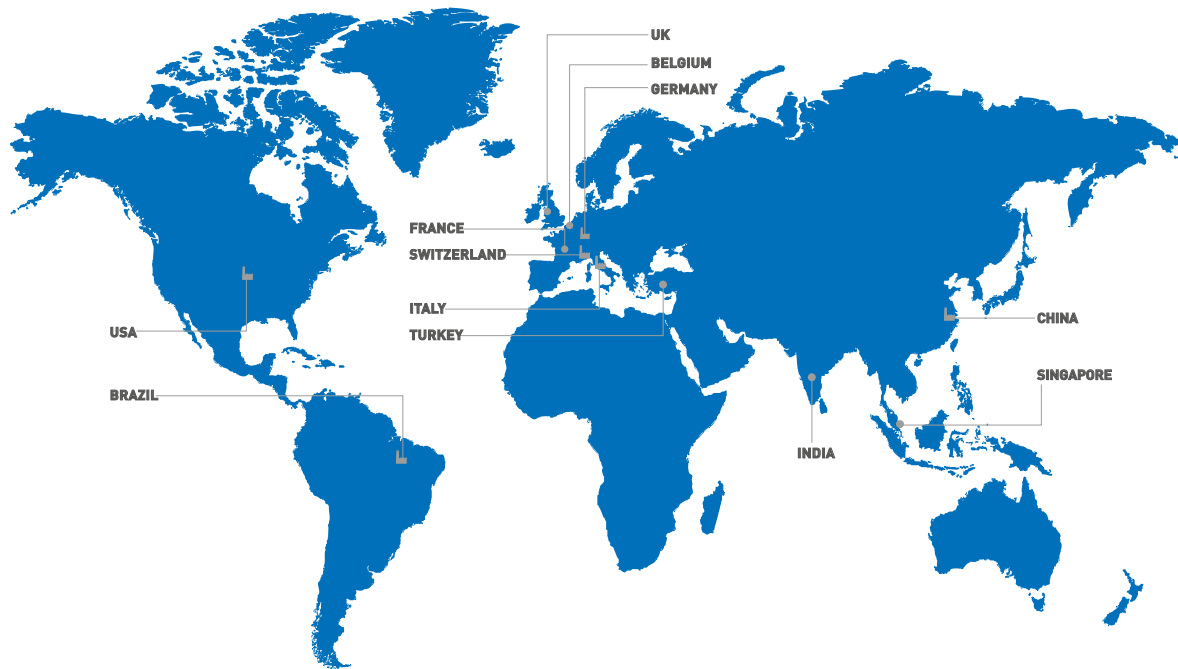

GEFRAN DEUTSCHLAND GmbH

Philipp-Reis-Straße 9a
D-63500
Seligenstadt
Ph. +49 (0) 61828090
Fax +49 (0) 6182809222
vertrieb@gefran.de

SIEI AREG - GERMANY

Gottlieb-Daimler Strasse 17/3
D-74385
Pleidelsheim
Ph. +49 (0) 7144 897360
Fax +49 (0) 7144 8973697
info@sieiareg.de

SENSORMATE AG

Steigweg 8,
CH-8355 Aadorf, Switzerland
Ph. +41(0)52-2421818
Fax +41(0)52-3661884
http://www.sensormate.ch

GEFRAN FRANCE SA

PARC TECHNOLOGIE
Bâtiment K - ZI Champ Dolin
3 Allée des Abruzzes
69800 Saint-Priest
Ph. +33 (0) 478770300
Fax +33 (0) 478770320
commercial@gefran.fr

GEFRAN BENELUX NV

ENA 23 Zone 3, nr. 3910
Lammerdries-Zuid 14A
B-2250 OLEN
Ph. +32 (0) 14248181
Fax +32 (0) 14248180
info@gefran.be

GEFRAN UK Ltd

Clarendon Court
Winwick Quay
Warrington
WA2 8QP
Ph. +44 (0) 8452 604555
Fax +44 (0) 8452 604556
sales@gefran.co.uk

GEFRAN MIDDLE EAST ELEKTRIK VE ELEKTRONIK San. ve Tic. Ltd. Sti

Yesilkoy Mah. Ataturk
Cad. No: 12/1 B1 Blok K:12
D: 389 Bakirkoy /Istanbul TURKIYE
Ph. +90212 465 91 21
Fax +90212 465 91 22

GEFRAN SIEI Drives Technology Co., Ltd

No. 1285, Beihe Road, Jiading
District, Shanghai,
China 201807
Ph. +86 21 69169898
Fax +86 21 69169333
info@gefran.com.cn

GEFRAN SIEI - ASIA

31 Ubi Road 1
#02-07,
Aztech Building,
Singapore 408694
Ph. +65 6 8418300
Fax +65 6 7428300
info@gefran.com.sg

GEFRAN INDIA

Survey No. 191/A/1,
Chinchwad Station Road,
Chinchwad,
Pune-411033, Maharashtra
Ph. +91 20 6614 6500
Fax +91 20 6614 6501
gefran.india@gefran.in

GEFRAN Inc.

8 Lowell Avenue
WINCHESTER - MA 01890
Toll Free 1-888-888-4474
Fax +1 (781) 7291468
info.us@gefran.com

GEFRAN BRASIL ELETRÓELETRÔNICA

Avenida Dr. Altino Arantes,
377 Vila Clementino
04042-032 SÃO PAULO - SP
Ph. +55 (0) 1155851133
Fax +55 (0) 1132974012
comercial@gefran.com.br

GEFRAN HEADQUARTER

Via Sebina, 74
25050 PROVAGLIO D'ISEO (BS) ITALY
Ph. +39 03098881
Fax +39 0309839063

Drive & Motion Control Unit

Via Carducci, 24
21040 GERENZANO (VA) ITALY
Ph. +39 02967601
Fax +39 029682653
info.motion@gefran.com

Technical Assistance:
technohelp@gefran.com

Customer Service
motioncustomer@gefran.com
Ph. +39 02 96760500
Fax +39 02 96760278



www.gefran.com

GEFRAN