


Main features


- Temperature limits: - 80 ... + 600° C
- Tolerance: UNI 7937, IEC 751 standards:
 - ± 0.15° C at 0° C for class A (1/2 DIN)
 - ± 0.30° C at 0° C for class B (1 DIN)
 - ± 0.10° C at 0° C for class 1/3 DIN
- Insulation: > 100 MOhm for voltage values from 10 to 100 Vcc
- PT100 wire-wound resistance thermometer
- Application versatility

MODELS


Free wire insert

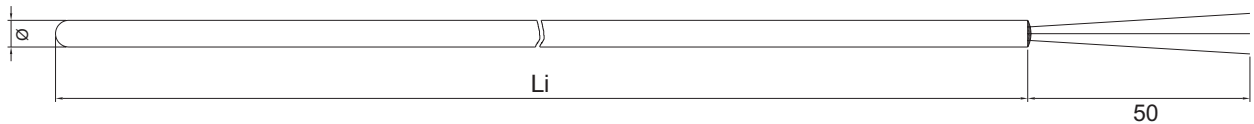

Sprung Insert

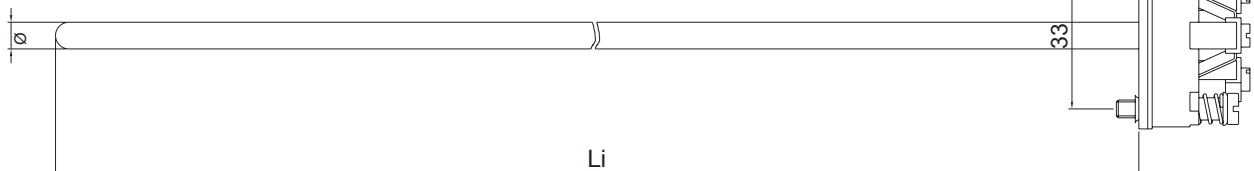

ORDER CODE

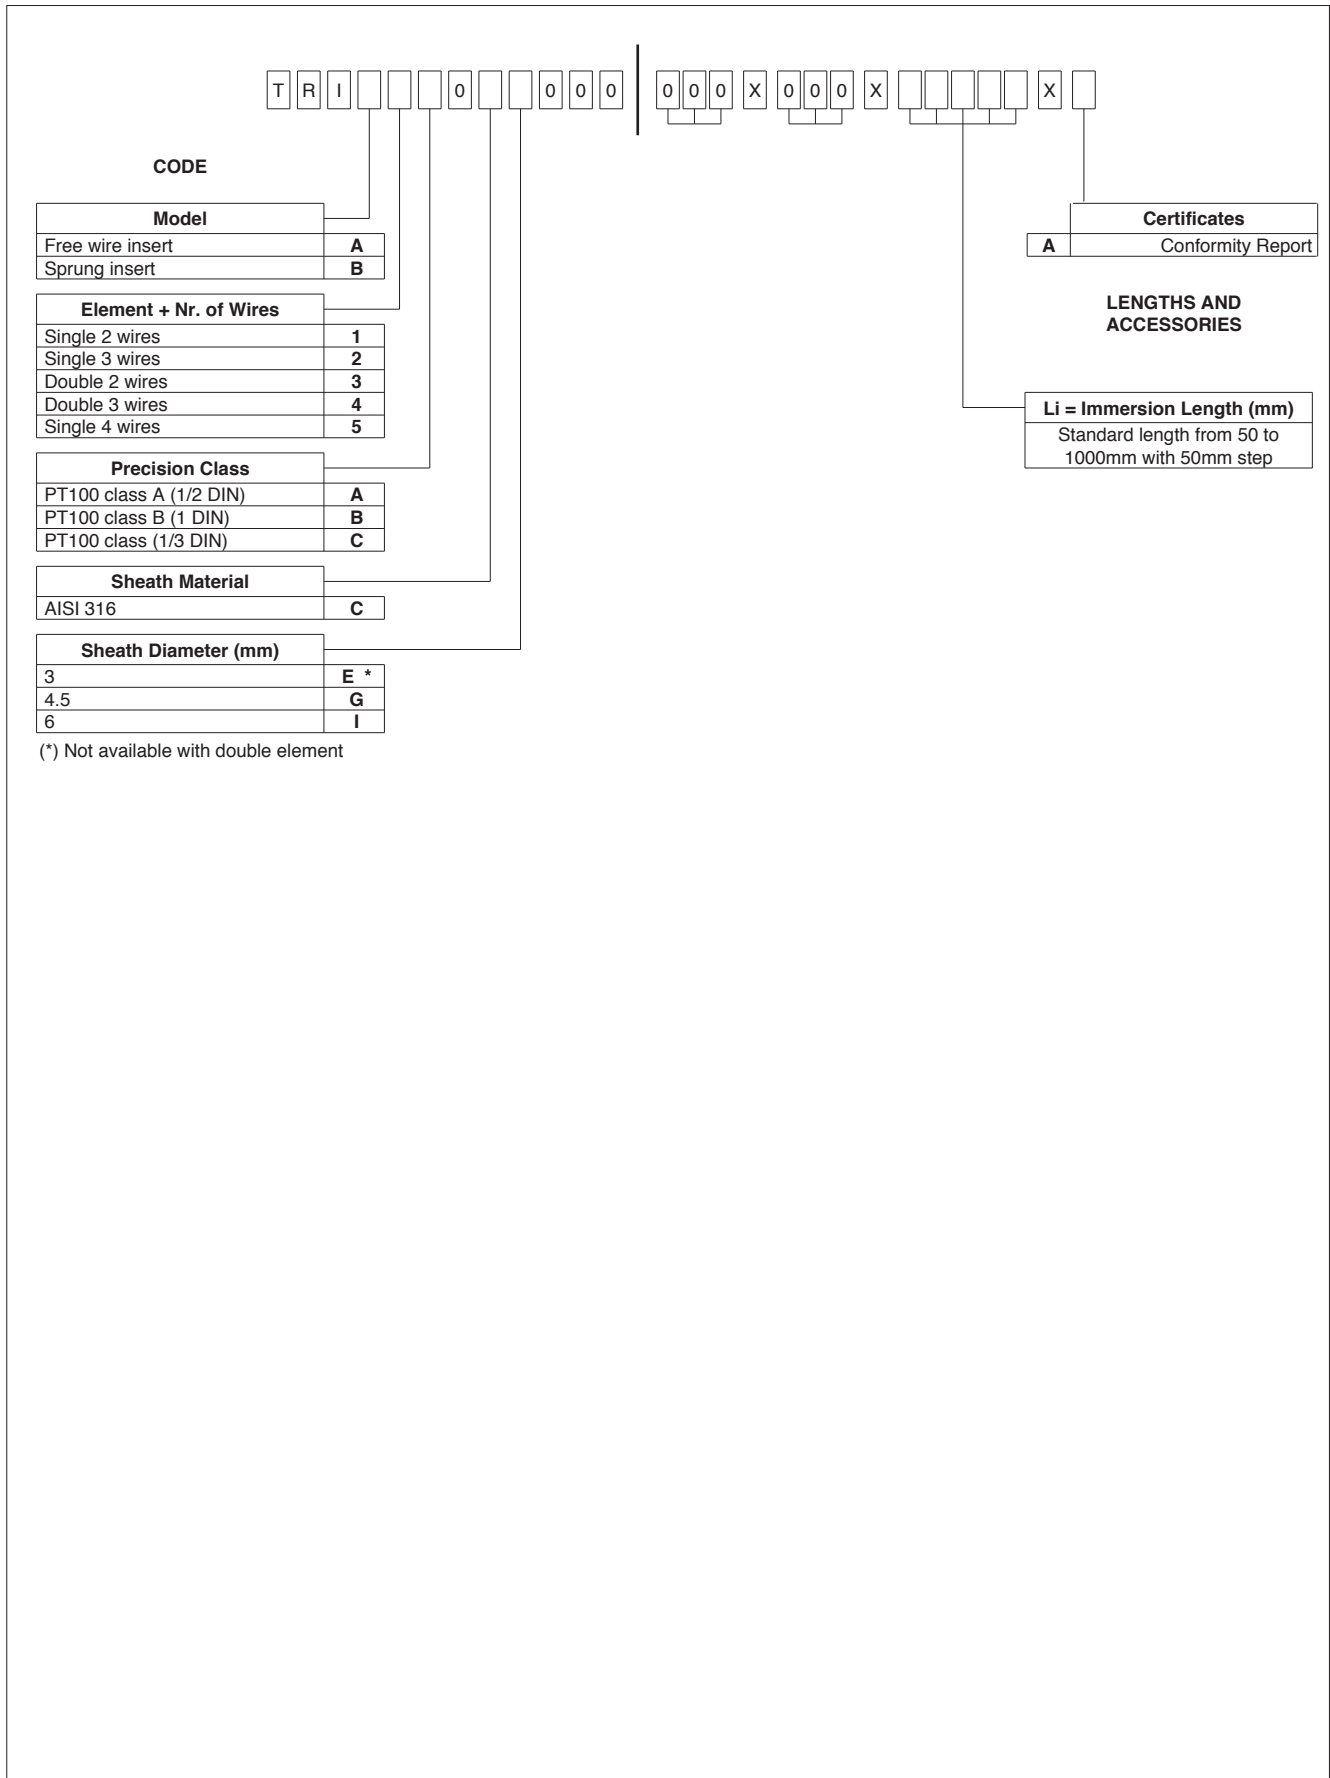

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice