





Main features

- Temperature limits: - 40 ... + 150° C
- Tolerance: UNI 7937, IEC 751 standards:
 - ± 0.15° C at 0° C for class A (1/2 DIN)
 - ± 0.30° C at 0° C for class B (1 DIN)
 - ± 0.10° C at 0° C for class 1/3 DIN
- Tinned copper conductors with silicon rubber insulation
- PT100 wire-wound resistance thermometer
- Extension cable with 4 tinned copper conductors, silicon rubber primary insulation with Mylar Aluminium screen, silicone rubber outside insulation.
- Free wire termination
- Transition with 12 mm external diameter with circular tightned folded seam (double)
- Specific use for immersion in concrete

MODELS

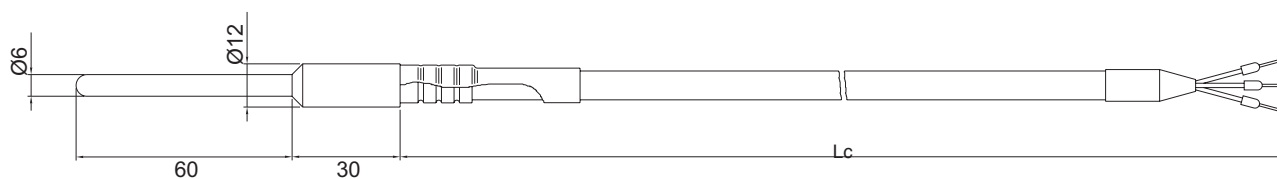

ORDER CODE

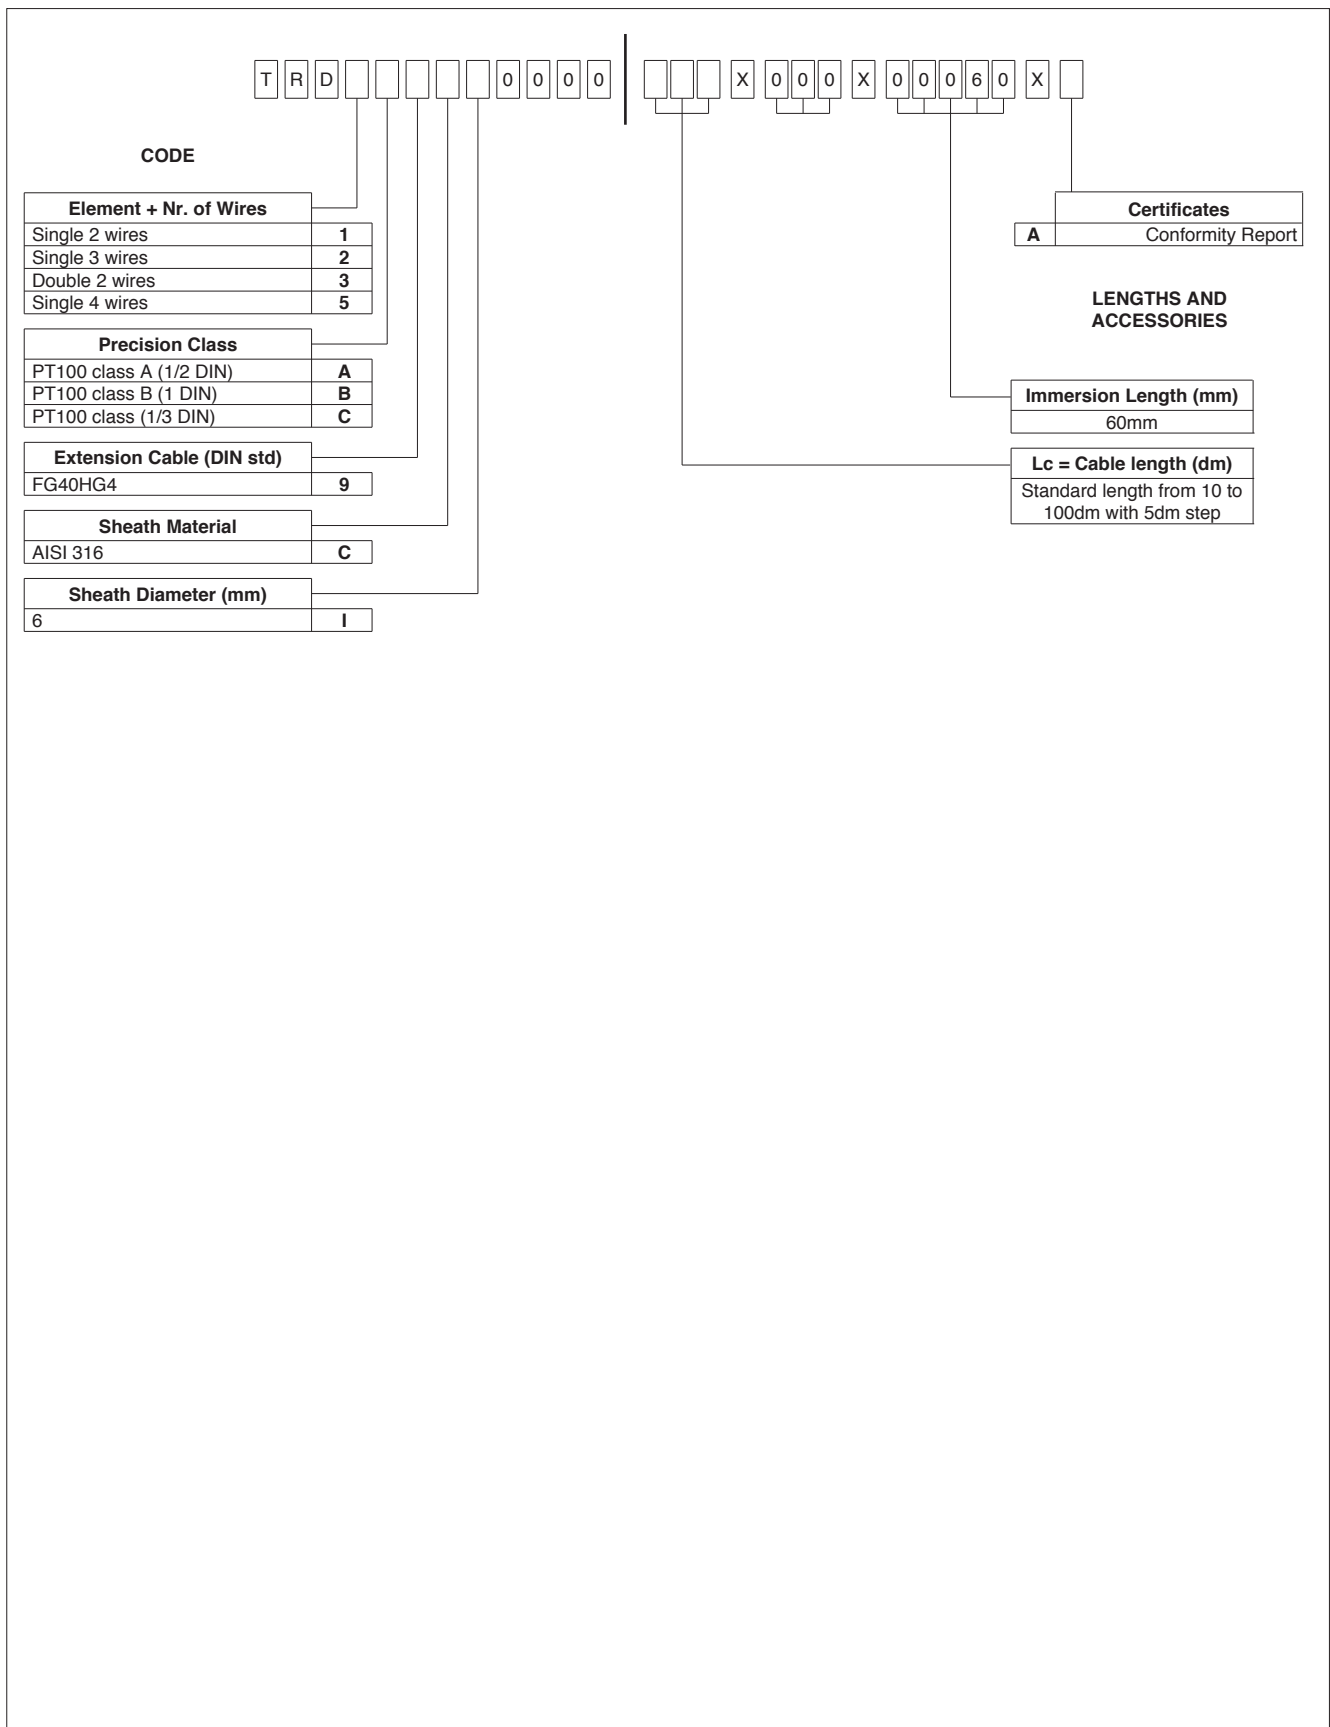

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice