GEFRAN

4A 48 / 4A 96

AC CURRENT / VOLTAGE CONFIGURABLE INDICATOR



Main features

- · AC voltage, AC current direct input on instrument terminals
- · Protected by a personal code
- · Configurable by serial link
- · Labels to customize measured physical unit

Main applications

- · Extrusion lines
- Electrical panels
- Test benches
- Food processing equipment

GENERAL

Microprocessor based indicator in both 48x48 (1/16 DIN) and 96x48 (1/8 DIN) formats manufactured with SMT.

The instruments have a lexan membrane faceplate (guaranteed to IP65) which has 3 keys, a 3-digit display for the 48x48 format or a 3 / 4 digit display for the 96x48 format.

The input signal section provides for the visualisation of the sinusoidal effective value corresponding to following signals:

- · AC voltage: 0 to 2, 0 to 20, 0 to 200 and 0 to 500Vac
- · AC current: 0 to 20, 0 to 50, 0 to 200mAac 0 to 1, 0 to 5Aac

The selection is made using the faceplate keys and correct input terminals.

No external shunt or adapter is required. The programming of the instrument is made easy by grouping the parameters in function blocks and by a simplified data entry menu.

The configuration can be simplified even further using the PC programming kit made up of a connection cable and a menu guide

program that runs under Windows (See TECHNICAL DATA Manual Quick Guide GF_eXpress).

configurable personal software protection code (password protection) can be used to restrict the levels of editing and displaying the configuration parameters.

INPUTS

Accuracy:

0,2% f.s. ±1 digit for 2Vac, 20Vac, 20mAac, 50mAac, 1Aac inputs 0,5% f.s. ±1 digit for 200Vac, 500Vac, 200mAac, 5Aac inputs

The measurement of the effective value considers the sinusoidal signal. Sampling time 120msec, resolution 8000 steps.

Configurable decimal point position, scale -1999 to 9999 (4 digit display) or -999 to 999 (3 digit display with sign, only for the 96 format) with over- and under-range indication.

Voltage input for 2Vac, 20Vac, 200Vac, 500Vac with Ri > 1M Ω . Current input for 20mAac, 50mAac, 200mAac with Ri = $1,6\Omega$. Current input for 1Aac, 5Aac with $Ri = 16m\Omega$.

POWER SUPPLY

4A 48

Standard:100 to 240Vac ± 10% max 5,5VA optional: 20 to 27Vac/dc ± 10% max 5,5VA 4A 96

Standard:100 to 240Vac/dc ± 10% max 5VA

optional: 11...27Vac/dc \pm 10% max 3VA 50/60Hz, protected by an internal fuse (not replaceable by the operator).

AMBIENT CONDITIONS


Working temperature range: 0 to 50°C Storage temperature range: -20 to 70°C Humidity: 20 to 85%Ur non-condensing

WEIGHT


150g. (48 format), 280g. (96 format) in

the complete version


FACEPLATE DESCRIPTION

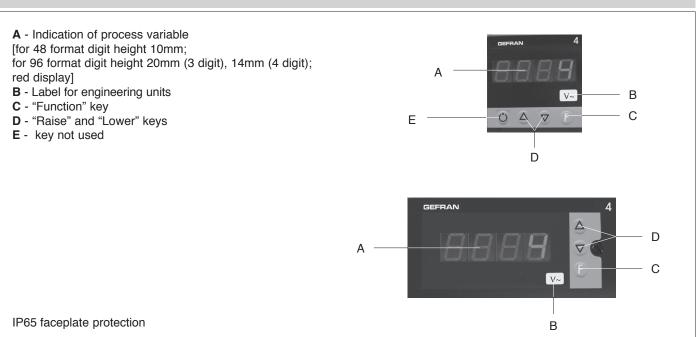


DIMENSIONS and CUT-OUT

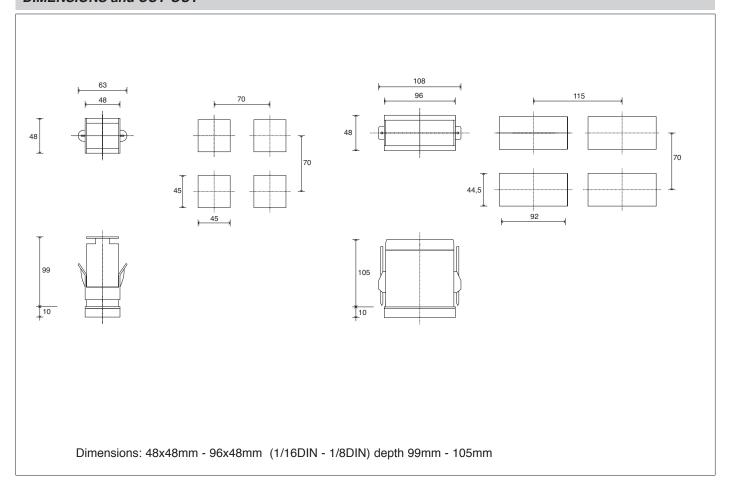

CONNECTION DIAGRAM

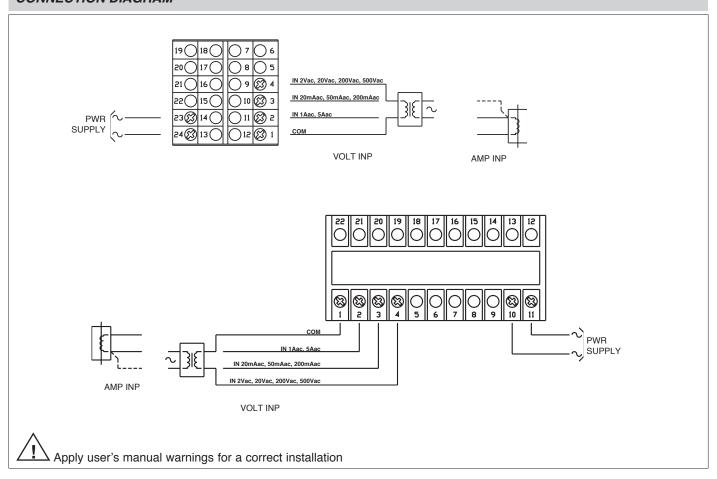

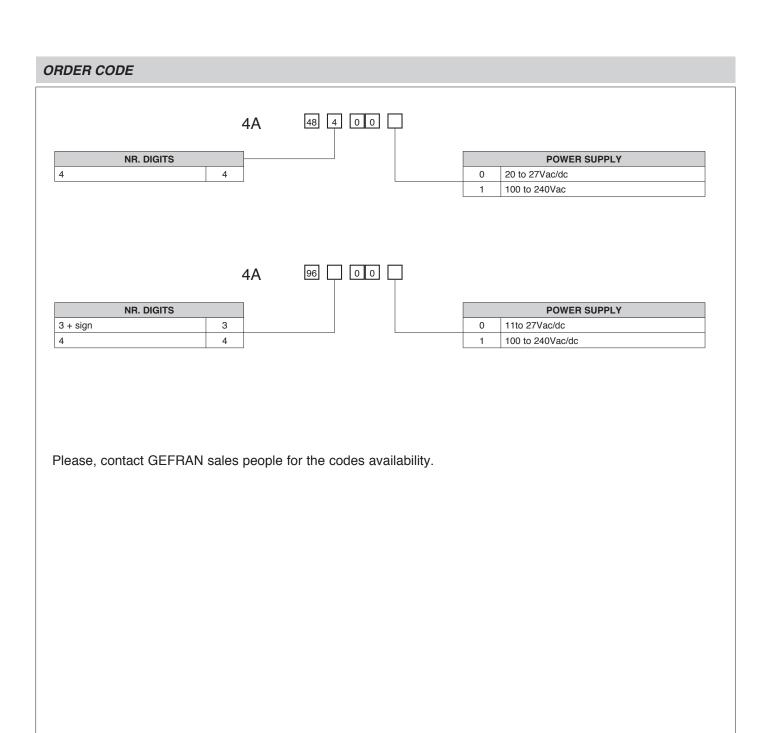

GEFRAN spa reserves the right to make any modification of the design or function, at any moment without prior notice



EMC (electromagnetic compatibility): conforms to directive 2014/30/EU with reference to standard EN61326-1 Safety LVD: conforms to directive 2014/35/EU with reference to standard EN 61010-1

